


PLP-P26130  
 PLP-P26132  
 PLP-P26135  
 PLP-P26138

# Quick Reference Guide

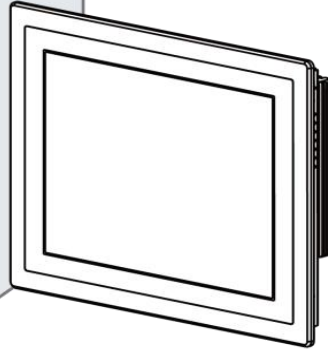

Ver. Q1

All Rights Reserved. Copyright 2014

## Specification

### System

CPU Support	Intel® D2550 processor on board
Chipset	Intel® NM10
OS Support	Windows 7
Memory Support	1 x DDR3 SO-DIMM Socket (up to 4GB)
Drive Bay	1 x 2.5" SATA HDD
Power Requirement	DC in 9~36V
Front Bezel	Aluminum
IP65	Front panel only
Wall Mount Type	VESA 75
Net Weight & Dimension (WxHxD)	<b>P26130:</b> 3.11 kg ; 281.6 x 228.8 x 68.98 mm <b>P26132:</b> 3.55 kg ; 324 x 253 x 71 mm <b>P26135:</b> 4.96 kg ; 395 x 294 x 74 mm <b>P26138:</b> 2.69 kg ; 252 x 184.6 x 71 mm
Certificate	FCC/CE

### I/O Ports

Serial Port	2 x COM ports (5V/12V/RI selectable) COM2 is RS-232/422/485 selectable.
USB	2 x USB 2.0
DVI	1 x DVI
LAN	2 x LAN (10/100/1000 Mbps)
Audio	1 x Line out, 1 x MIC-in
Expansion slot	1 x Mini-PCle slot, 1 x CFast card slot

### Display


LCD Panel Size & Resolution	PLP-P26130 10.4" SVGA or XGA PLP-P26132 12.1" XGA PLP-P26135 15" XGA PLP-P26138 8.4" SVGA
Touchscreen	(ELO) 5W Bezel-free Analog resistive (USB interface)

### Environment


Operating Temp.	HDD: 0 ~ 45°C (32 ~ 113°F) CFast Card: 0 ~ 55°C (32 ~ 131°F)
Storage Temp.	-20 ~ 60°C (-4 ~ 140°F)
Humidity	20 ~ 90%

## Jumper Setting


### LVDS Power Panel Connector




### COM2 Configuration Connector




### COM1 Configuration Connector




### COM2 Auto Detect Selection

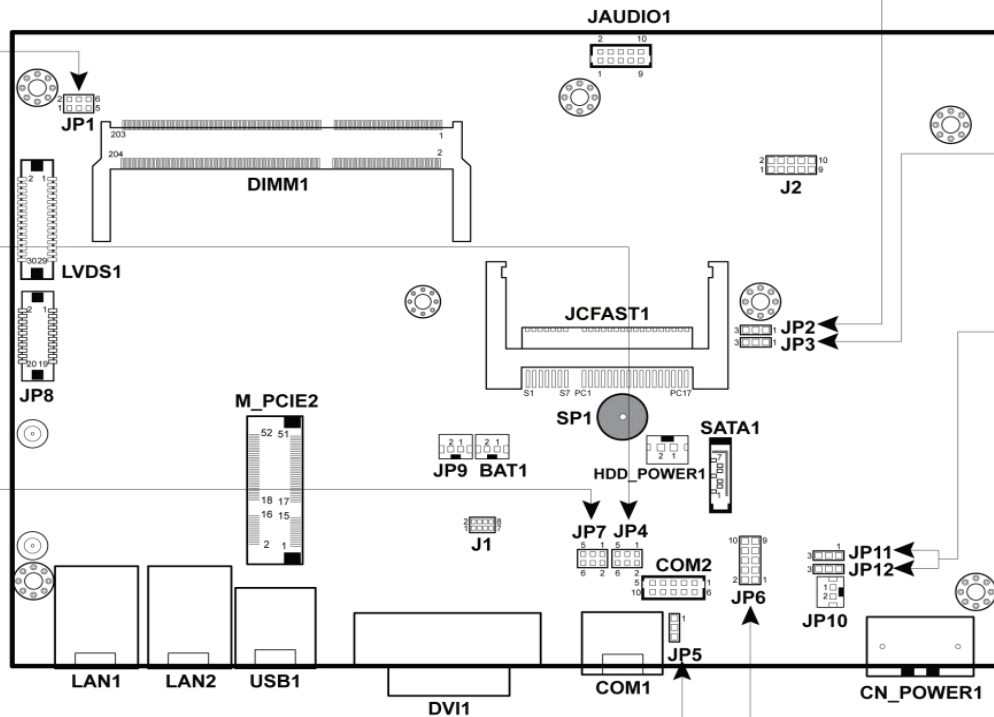


### Clear CMOS Data Selection




### CFast Card Power Connector



### System Power Selection



### COM2 RS232/422/485 Selection




# PLP-P26130 / P26132 / P26135 / P26138

## 10.4" / 12.1" / 15" / 8.4" Fanless Panel PC


### System View

(Take PLP-P26130 for example.)


#### Front View

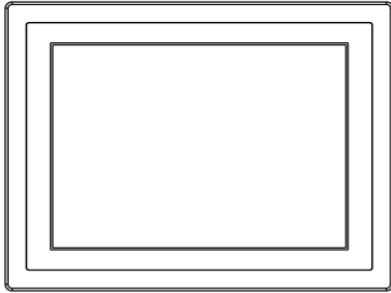


#### Rear View

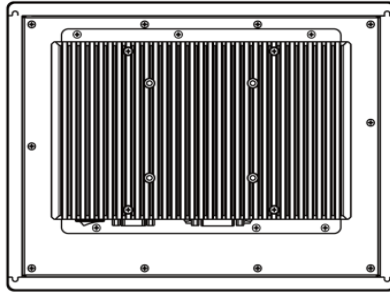


#### Top View



#### Rear View




#### I/O View

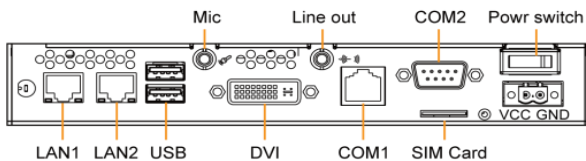


### Wall Mount

Cut-out Dimension:  
(Unit: mm)


PLP-P26130

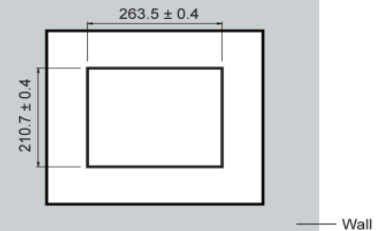


PLP-P26132

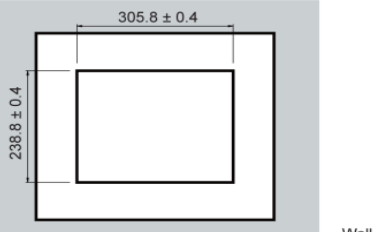

PLP-P26135

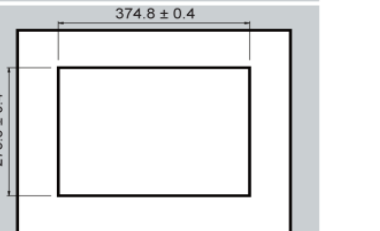

PLP-P26138

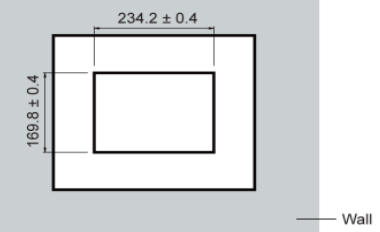

### Safety Precaution

The following messages are safety reminders on protecting your system from damages and extending a long life of the system.

#### 1. Check the Cable Voltage

- The range of operating voltage should be between DC 9V and 36V. Otherwise, the system could be damaged.

#### 2. Environmental Conditions

- Place the system on a sturdy & level surface. Be sure to allow enough space to have easy access around the system.
- Avoid extremely hot or cold place to install the system.
- Avoid exposure to sunlight for a long period of time or in a airtight space. Also, avoid the system from any heating device or using PLP-P26130/26132/26138 when it's been left outdoors in a cold winter day.
- Note that the operating ambient temperature is 0~45°C for HDD & 0~55°C for CFast card.
- Avoid moving the system rapidly from a hot place to a cold one and vice versa because condensation may come from inside of the system.
- Place the system in strong vibrations may cause hard disk failure.
- Do not place the system close to any radio active device in case of signal interference.

#### 3. Handling

- Avoid putting heavy objects on top of the system.
- Do not turn the system upside down. This may cause the hard drive to mal-function.
- If water or other liquid spills into this product, unplug the power cord immediately.

#### 4. Good Care

- When the outside of the case is stained, remove the stain with neutral washing agent with a dry cloth.
- Never use strong agents such as benzene or thinner to clean the system.
- If heavy stains are present, moisten a cloth with diluted neutral washing agent or alcohol, and then wipe thoroughly with a dry cloth.
- If dust has been accumulated on the outside, clean with a special vacuum cleaner made for computers.

**CAUTION!** Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries per the manufacturer's instructions.

**WARNING!** Some internal parts of the system may have high electrical voltage. Therefore we strongly recommend qualified engineers open and disassemble the system. The LCD and touch screen are easily breakable, please handle them with extra care.